


- NOTES**
1. The works area is approximately 184m long by 14.3m wide.
 2. Remove all surface vegetation.
 3. Starting at the lower end of the works, the area immediately upstream of the weir is to be cleared of silt to bed level for a sufficient distance to give a full weir discharge.
 4. The remaining 140m of brook is to have exposed silt reduced in height to near water level and to have the existing free channel widened and excavated to natural bed level.



Notes and clearance zone amended		MHE	13.12.17	A
AMENDMENT DETAILS		BY	CHKD	DATE
DRAWN BY	CHECKED BY	APPROVED BY	SCALE	
DATE	DATE	DATE	500	
ORIGINAL DRAWING SIZE 841 x 594 (A1)				

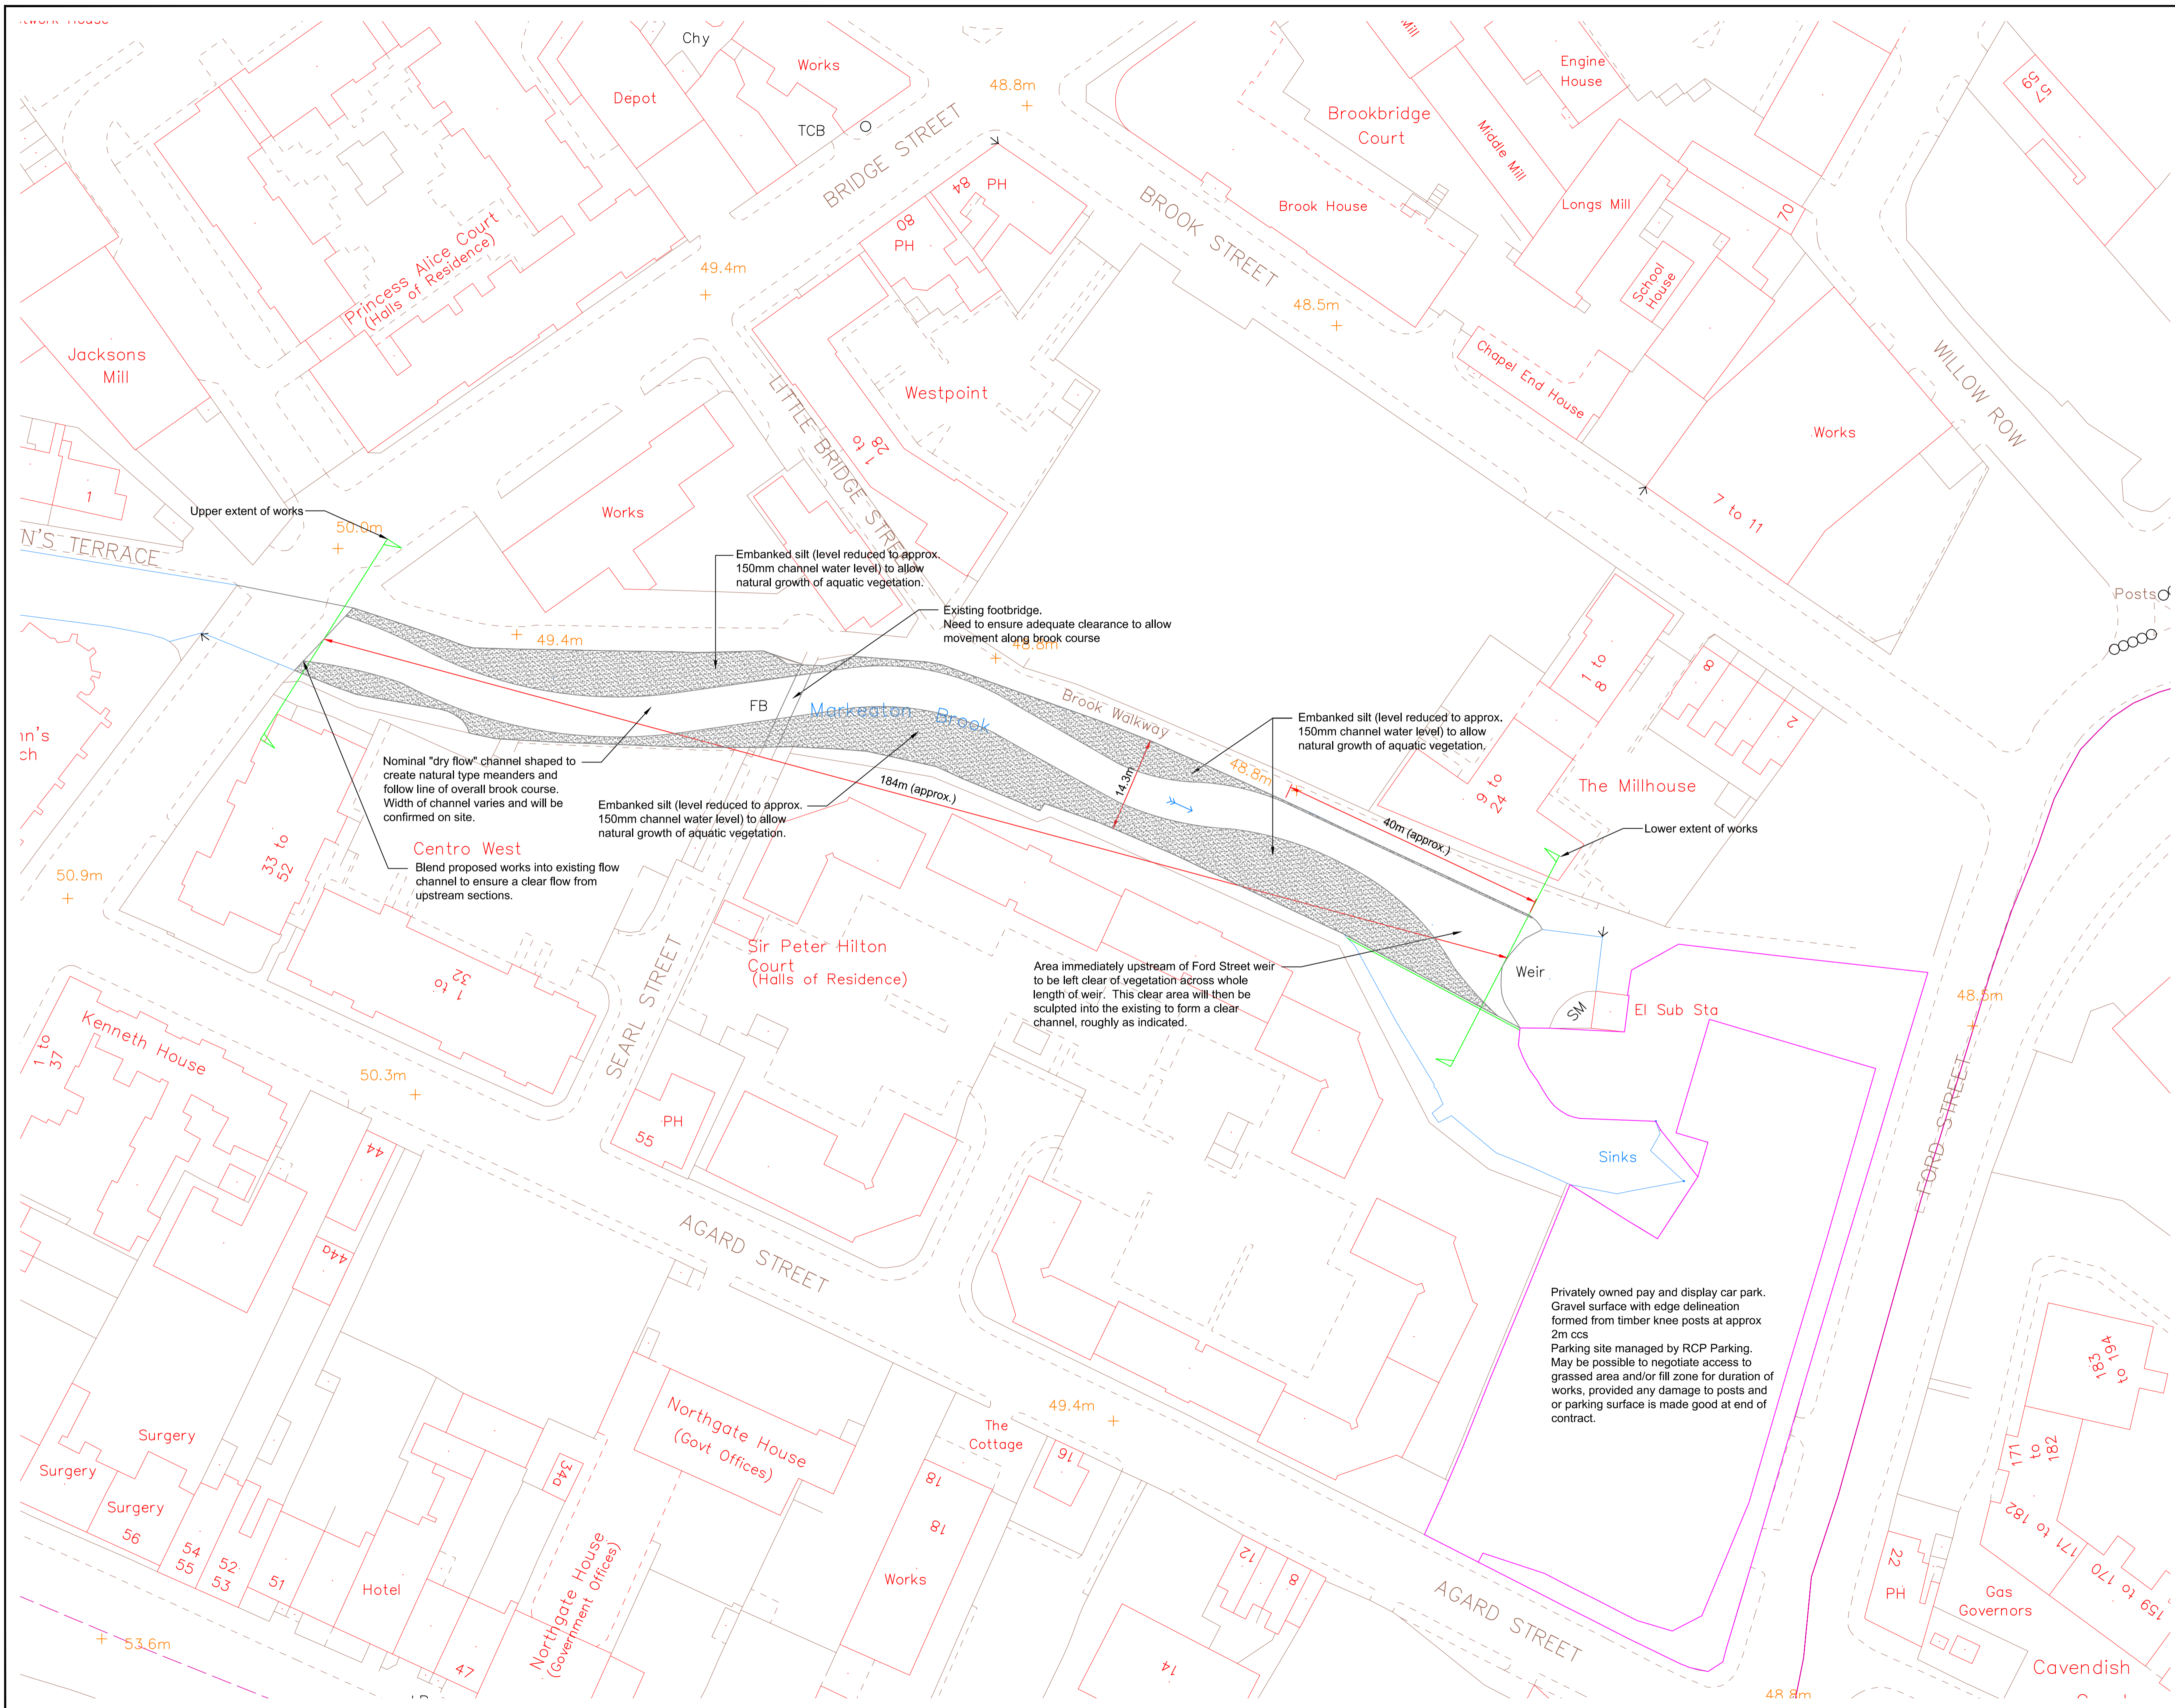

DERBY CITY COUNCIL

NEIGHBOURHOODS
 Director
 Christine Durrant
 Council House
 Corporation Street
 Derby DE1 1FS
 Tel (01332) 293111, Fax (01332) 643299

PROJECT TITLE
 MARKEATON BROOK DESILT
 PHASE 1
 BRIDGE STREET TO FORD STREET

DRAWING TITLE
 GENERAL LAYOUT DRAWING
 TO SHOW EXTENT AND
 TYPE OF WORKS

PROJECT REFERENCE NUMBER	LD10197	REVISION	A
DRAWING NUMBER	102		

This map is based upon Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationery Office © Crown Copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. (100024913) (2010).